


# ASPL V60

## 230W

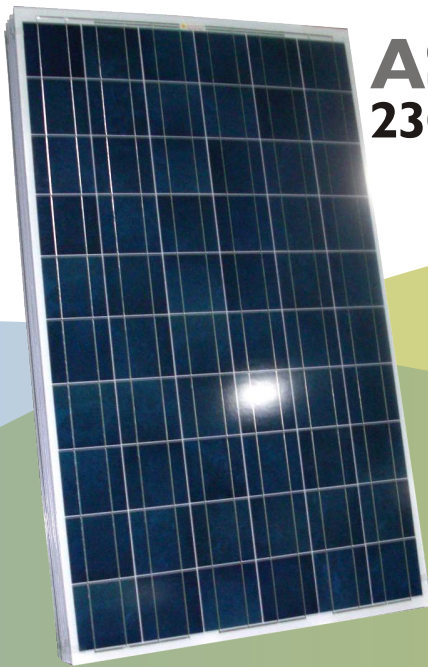

**Ajit Solar Pvt. Ltd**

**Office:** National Motors Building, M.I. Road, Jaipur-302 001, INDIA

**Factory:** E-33-34,RIICO Industrial Area, Bagru(Extn.) Jaipur, INDIA

**Ph:** (O) 91-141-2371166

**Fax:** 91-141-4011711

**Website:** www.ajitsolar.com

**E mail:** ajitsolar@ajitgroup.com

### Electrical Characteristics

Nominal Power	Pm(Wp)	230
Power tolerance	%	±3
Rated Voltage	Vm(V)	29.6
Rated Current	Imp(I)	7.77
Open Circuit Voltage	Voc(V)	37.1
Short Circuit Current	Isc(I)	8.28
Cell Efficiency	%	16
Module Efficiency	%	14
Max. System Voltage	VAC	1000

### Absolute Ratings

Dielectric Insulation Voltage	3000max,VDC
Operating Temperature	-40 to +85oC
Storage Temperature	-40 to +85oC
Maximum Mechanical load	5400N/m2



### Mechanical Characteristics

Module Dimensions	1665x995x50
Weight	22kg
Cables Characteristics	4mm <sup>2</sup> , TUV certified, 1000mm
Glass, Type & Thickness	High Transmission, Low Iron, Tempered, 4mm

### Constructive Details

Cell Configuration	60
Cell Size	6"x6"
Frame Size	1665x995x50
No of Bypass diodes	3pcs
Max.Series fuse Rating	12A
Junction Box Protection	IP 65

### IV Curve

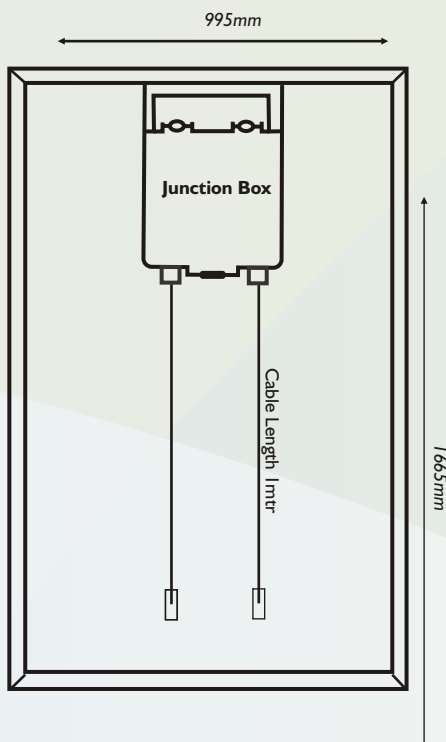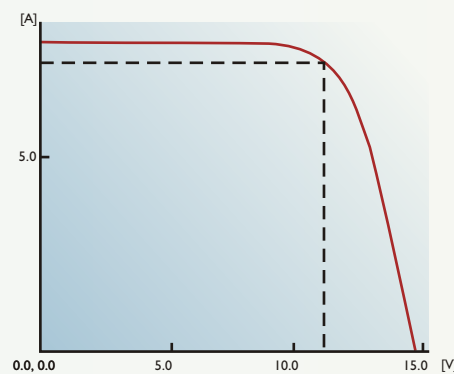

### Packing Configuration

Packing Configuration	23pcs/box
Quantity/Pallet	25pcs/pallet
Loading Capacity	560pcs/40ft

Nominal rating at STC: 100W/m<sup>2</sup> AM 1.5. 25°C.  
Electrical Parameter Tolerance +/-3%.  
Due to its policy of constant development, ASPL reserves the right to modify technical data without prior notice.

**Warranty**  
60 months limited product workmanship warranty  
12 year limited power warranty (for 90% of NP)  
25 years limited power warranty (For 80% of NP)

**Certificates**  
\*IEC 61215, Safety Tested IEC 61730, CE Marking  
UL 1703, CEC Listing & class C Fire Rating